









45 kN						
	L73 ϕ 25 mm	3/8" BSP	250 bar	3/8" BSP	200 bar	300 bar

22.5
kN

1300
nm



26
kg

20
l/min

Rotator's upper mount is applied in EYE form factor of the knuckle joint. Robust and tough built to withstand even overloads. The wide of eye is common standard width 73mm and the knuckle pin diameter 25mm.

Hydraulic rotator FHR 4.500L/68 is cost-effective solution generally for seasonal use in forestry, agriculture, road and building construction, general cargo and material handling.

Rotator lower mount is applied in AXLE form factor to mount in grapple / tool mounting tube or addaptor and by fixing with pin. Axle (shaft) diameter is 68mm and the fixing pin (not included) diameter 30mm




	
ϕ 68 ϕ 30 mm	3/8" BSP



FHL 01-A/B-73/25



FHL 01B-A/B-73/25

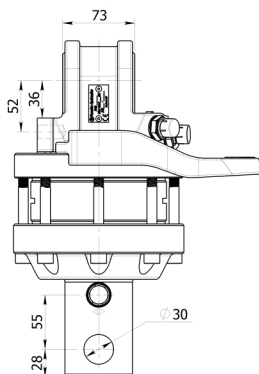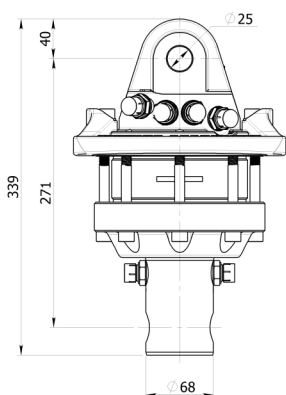

We delivery only professional products:



KONTAKT/CONTACT

+48 660 335 336, +48 660 337 336, +48 663 994 664

info@hydroexpert.eu