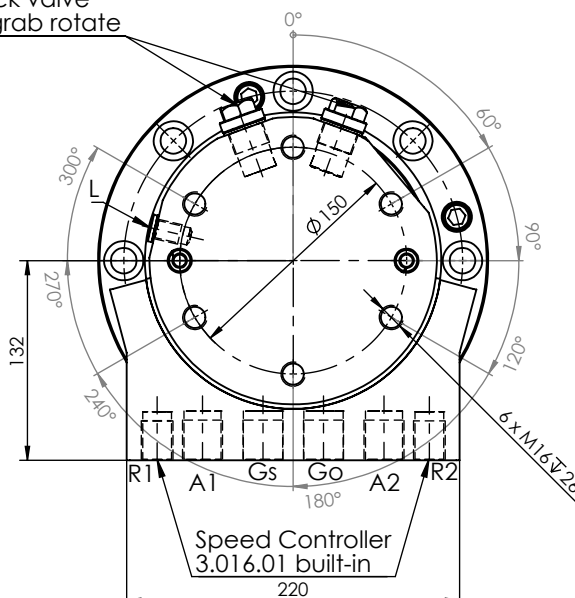

 Shock valve
 for grab rotate

Variant design:

 with 4 oil passages
 Stator with 6 x M16 thread PCD Ø150mm
 hole pattern is symmetrical

Accessories on request:

oil distributor size Ö2

Machine:

 Service weight:
 max. 12,0 ts with floating attachment
 max. 7,0 ts with rigid attachment




Add-on units:

 Clamshell buckets of max. 0,7 m³
 Glapples of max. 0,3 m³
 Grabs for demolition and sorting
 of max. 0,35 ts dead load
 Special devices on request.

Technical details:

max. thrust load:	= 60 kN
max. radial load:	= 40 kN
p max. grab	= 35 MPa/350bar
p max. rotating engine	= 25 MPa/250bar
max. torque	= 1650 Nm
Torque /1MPa	= 66 Nm
Adsorption volume	= 520 cm ³ /R
min. oil passage Gs / Go	= NW 12
Mass	= 73 kg
max. rotations	= 30 rpm
Bending moment Mb per.	= 12 kNm
	(leaf 4.606.00)

Connections:

R1,R2: rotator rotate	 G 1/2"
Go: open grab	 G 1/2"
Gs: close grab	 G 1/2"
A1,A2: additional function	G 1/2"
L: measuring conn.	G 1/4"

Volume of delivery:

 4 Sealing ring Nr. 116 Article no.: 1.02.149
 4 Connex-pin SG 16x30 -//- : 1.04.004

Paint: black primary coat